RANGE COMPOSITION

N 900: a range of over 150 models for the professional caterer designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected in the total modularity of the range that ensures innumerable configurations, either free-standing, bridged or cantilever. N900 demonstrates how advanced technology can satisfy the needs of the professional caterer.

The model detailed on this sheet is a gas solid top ideal for cooking items requiring differentiated heating zones.



M- 4-1 000000

N 900

GAS SOLID TOPS




FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Central burner with optimized combustion, maximum power 10.5 kW, with flame failure device and protected pilot light. Piezo ignition.
- ◆ Durable cast-iron cooking plate with differentiated heating zones, maximum temperature in the centre, 500°C, decreasing towards the perimeter.
- ◆ Worktop in 20/10 stainless steel. Front and side panels in stainless steel with Scotch Brite finish.
- ◆ All models have right-angled side edges to allow flush fitting between units, eliminating gaps and dirt traps.
- ◆ The special design of the control knob system guarantees against water infiltration.
- ◆ Main connections can be via the base of the unit.

- ◆ All top models can be easily mounted on refrigerated base, open base cupboards, bridging supports or cantilever systems.
- ◆ IPX5 water protection.

*In accordance with C€ regulations for gas models belonging to Class B11 (power over 14 kW), it is necessary to install a chimney (if installed under a hood) or chimney and draft diverter if the waste gases are vented directly outside.

TECHNICAL DATA	
CHARACTERISTICS	MODELS
	NTG800 200230
Power supply	Gas
External dimensions - mm	
width	800
depth	900
height	250
Solid top area - mm	
width	800
depth	700
Total Power - kW	10.5
Net weight - kg.	92

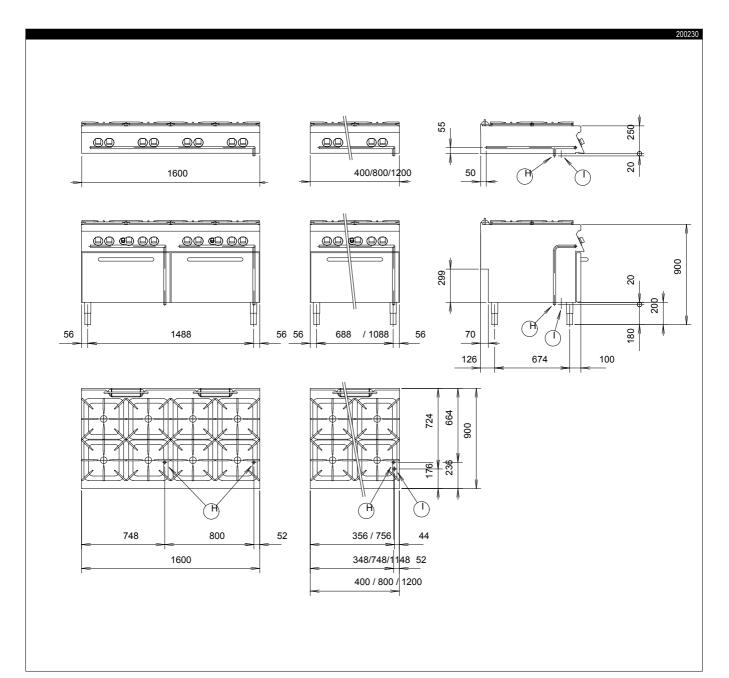

LEGEND	
	NTG800 200230
H. Cae connection	1/2"

OPTIONAL ACCESSORIES	
ACCESSORIES	MODELS
	NTG800 200230
2 SIDE COVERING PANELS FOR TOP-D=900MM	206278
CHIMNEY UPSTAND 800MM	206304
DRAUGHT DIVERTER WITH 150 MM DIAMETER	206132
FLUE CONDENSER FOR 1 MODULE DIAM.150MM	206156
FRONTAL HANDRAIL 1200 MM	206191
FRONTAL HANDRAIL 1600 MM	206192
FRONTAL HANDRAIL 400 MM	206166
FRONTAL HANDRAIL 800 MM	206167
JUNCTION SEALING KIT	206086
LARGE HANDRAIL(PORTIONING SHELF)400 MM	206185
LARGE HANDRAIL(PORTIONING SHELF)800 MM	206186
MATCHING RING FOR FLUE CONDENSER 150DIAM	206133
PAIR OF COVERING STRIPS FOR END ELEMENTS	206234
PRESSURE REGULATOR FOR GAS UNITS	927225
REAR FLUE UPSTAND FOR LARGE CHIMNEY	206160
SIDE HANDRAIL-RIGHT/LEFT HAND	206165
WATER COLUMN EXTENSION FOR 900 LINE	206290
WATER COLUMN WITH SWIVEL ARM	206288











www.zanussiprofessional.com